


d	*AT		Type 1		Type 2		D3
	D	L	D1	L1	D2	L2	
15**	27.0	26.0	30	5.0	30	5.0	-
16**	27.0	26.0	30	5.0	30	5.0	-
20	34.0	32.5	44	8.5	38	8.0	60
25	39.5	34.5	50	8.0	44	9.0	60
30	48.0	40.2	57	9.8	50	9.0	70
35	51.5	41.0	65	10.5	58	9.5	80
40	57.0	42.5	70	12.0	64	10.0	85
45	62.9	43.0	70	12.0	66	10.0	90
50	68.0	45.4	80	13.0	72	11.1	95

Technical features

- Double seal
- Single spring
- Unbalanced
- Bi-directional
- Elastomer bellows

Operating limits

P = 72 PSI
 T = -95 to 320°F
 V = 52 ft/s

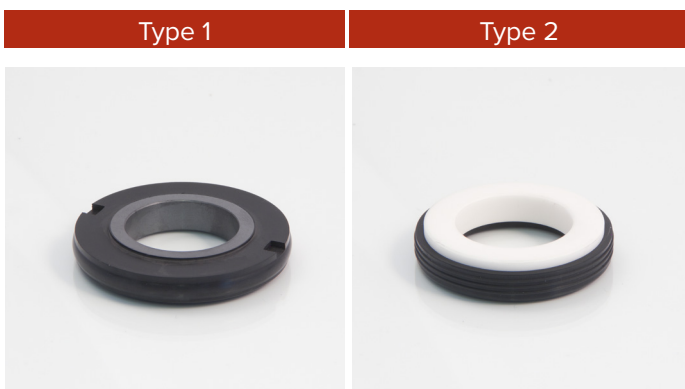

Description	Materials
Primary rings	silicon carbide, carbon graphite, tungsten carbide
Mating rings	silicon carbide, ceramic, tungsten carbide
Secondary seals	NBR, EPDM, Viton
Metal parts	Stainless 304 / Stainless 316*

* upon request

** Retaining plate unavailable for 15 and 16 mm size